

Available from:



Mahr | A passion for detail

Edition 2025

Mahrlights

MarConnect

Best performance in every step

Integrated Wireless

130 products in 4 product groups

MarCator

Digital dial indicators with touch keys and modern connectivity

Many more innovations



Special offer prices 09/17 - 12/31/2025



www.metrology.mahr.com

MarConnect | Measuring data processing

MarCom Professional | Software

Your interface for even greater performance

Two steps to the goal: combine your Integrated Wireless instruments with our multifunctional MarCom Professional software. This versatile interface tool combines data acquisition and data transfer with your data processing. How you process the collected data is entirely up to you - for maximum flexibility, choose from a range of output formats.

Enjoy maximum individuality at the workplace with a free choice of output medium and four output formats:



MarCator 1087 Ri digital indicators

- · Virtual interface box: CAQ/SPC software
- · Intelligent Excel interface: Microsoft Excel
- · Emulation keyboard: any Windows software
- · Text file: flexible data processing







Software: MarCom Professional available for free download: www.mahr.com/marcom

MarConnect | Measuring data processing



The Micromar 44 EWRi inside micrometer with Integrated Wireless



MarSurf M 310 roughness measuring instrument with USB wireless adapter

Improved functions:

- · Additional data: Additional values are transferred to supplementary columns (name, serial number, item number, date and time)
- · Device parameters can now be preset: reference values (preset, tolerance limits, warning limits in %), as well as, function locks can be queried and changed on the instrument
- · Improved Excel functionality:
 - · Easily undo the last data transfer right in the program with a simple click
 - · Adapted column and row names: Z1S1 reference style for use with Excel as in practice

Powerful and user-friendly due to continual updates!

Perfectly coordinated: MarCom Professional is the ideal data transfer software for all your quality assurance and production needs. It is perfectly equipped from the Integrated Wireless product line. A number of additional functions offer users maximum convenience when recording and transferring measurements.

faster configuration conveniently configure your measuring instruments via PC interface and eliminate the need for manually setting the instrument.

more reliable

Avoid operating errors: all information is automatically transferred and assigned thanks to the automatic identification of measurements and serial number transfers.

New features:

- · IATF ready: transfers and displays the measuring equipment ID and item and serial number to clearly allocate the measuring equipment to the measurements
- · Tab settings in up to 3 areas: settings, device parameters and goal
- · Scalable measurement value display
- · Manually sort the device overview using drag-and-drop



It couldn't be easier!

Scan the QR code and watch the video showing the practical application of the Integrated Wireless handheld measuring devices.

Comprehensive product range

with Integrated Wireless

Product groups

Mahr offers a comprehensive range of measuring instruments with integrated wireless data transmission. for use in all areas of industrial manufacturing and quality control. The Integrated Wireless range from Mahr delivers accurate measuring results with full mobility. Modern, simple measuring solutions - without the limitations of wired technology.

Products



MarCal 16 EWRi / 30 EWRi

Digital calipers with wireless interface





Order no.	Product	Measuring range	Resolution	Depth rod	Details	List price	Offer price
		mm	mm			EUR	MYR
4103400	16 EWRi	0 – 150	0,01	round	With measuring blades	-271,00-	728.00
4103402	16 EWRi	0 -150	0,01	square	With measuring blades	-271,00-	728.00
4126671	30 EWRi	0 -150	0,01		With measuring pin Ø 1,5 mm	510,00	1,371.00
4126672	30 EWRi	0 -200	0,01		With measuring pin Ø 1,5 mm	-576,00-	1,547.00
4126673	30 EWRi	0 - 300	0,01		With measuring pin Ø 1,5 mm	-663,00-	1,781.00

Accessories	for measurir	g instruments with Integrated Wireless		
4102220	i-Stick	Wireless receiver for measuring instruments with Integrated Wireless	-121,00 -	557.00

Micromar 40 EWRi / 40 EWRi-L

Micrometers according to your wishes





Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4157100	40 EWRi	0 - 25	0,001	Standard version	-351,00-	1,284.00
4157101	40 EWRi	25 – 50	0,001	Standard version	-415,00-	1,517.00
4157115	40 EWRi	0 - 100	0,001	Standard version. set with 4 micrometers	1.860,00	6,796.00
4157120	40 EWRi-L	0 - 25	0,001	QUICK DRIVE, 5 mm per rotation	-438,00 -	1,736.00
4157121	40 EWRi-L	25 – 50	0,001	QUICK DRIVE, 5 mm per rotation	- 499,00 -	2,058.00

Accessories	s for measu	ring instruments with Integrated Wireless		
4102220	i-Stick	Wireless receiver for measuring instruments with Integrated Wireless	- 121,00 -	557.00

Micromar 44 EWRi / 844 EWRi



Digital 3-point inside micrometer / Digital 3-point inside measuring device





12,864.00 Micromar 44 EWRI-SET







Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4191340	44 EWRi	6 – 12	0.001 / .00005"	Measurement of through holes and blind holes	-2250.00 -	9,649.00
4191341	44 EWRi	12 - 20	0.001 / .00005"	Measurement of through holes and blind holes	-1930.00 -	8,278.00
4191342	44 EWRi	20 - 50	0.001 / .00005"	Measurement of through holes and blind holes	3000.00	12,864.00
4191343	44 EWRi	50 – 100	0.001 / .00005"	Measurement of through holes and blind holes	3580.00	15,351.00
4192340	844 EWRi	6 – 12	0.001 / .00005"	Measurement of through holes and blind holes by lever release	2130.00	9,134.00
4192341	844 EWRi	12 - 20	0.001 / .00005"	Measurement of through holes and blind holes by lever release	-2200.00	9,435.00
4192342	844 EWRi	20 – 50	0.001 / .00005"	Measurement of through holes and blind holes by lever release	-3100.00	13,293.00
4192343	844 EWRi	50 – 100	0.001 / .00005"	Measurement of through holes and blind holes by lever release	3680.00	15,781.00

Accessorie	es for meası	uring instruments with Integrated Wireless		
4102220	i-stick	Wireless receiver for measuring instruments with Integrated Wireless	-121.00 -	557.00

MarCator 1086 Ri / 1087 Ri

Digital dial indicators with touch operation





				No.		
Order no.	Product	Indicator range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4337720	1086 Ri	12,5	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences	-549,00 -	2,174.00
4337721	1086 Ri	25	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences	-617,00 -	2,444.00
4337820	1087 Ri	12,5	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences, dynamic measurements such as radial run-out, straightness and flatness using MAX / MIN / MAX-MIN functions	-609,00 -	2,413.00
4337821	1087 Ri	25	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences, dynamic measurements such as radial run-out, straightness and flatness using MAX / MIN / MAX-MIN functions	-690,00-	2,733.00

Accessori	es for me	asuring instruments with Integrated Wireless		
4102220	i-Stick	Wireless receiver for measuring instruments with Integrated Wireless	-121,00 -	557.00

MarCator 1086 Ri-HR / 1087 Ri-HR

Digital dial indicators with touch operation




Order no.	Product	Indicator range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4337770	1086 Ri-HR	12,5	0,0001, 0,0005, 0,001, 0,002, 0,005, 0,01	Dial indicator with lowest possible error limit and finest resolution, extensive measuring functions for static measurements	-709,00 -	2,807.00
4337850	1087 Ri-HR	12,5	0,0001, 0,0005, 0,001, 0,002, 0,005, 0,01	Dial indicator with lowest possible error limit and finest resolution, extensive measuring functions for static and dynamic measurements	-801,00 	3,172.00

Accessories	for measurir	g instruments with Integrated Wireless		
4102220	i-Stick	Wireless receiver for measuring instruments with Integrated Wireless	-121,00 -	557.00

Millimess 2000 Wi / 2001 Wi

Digital comparators with touch control

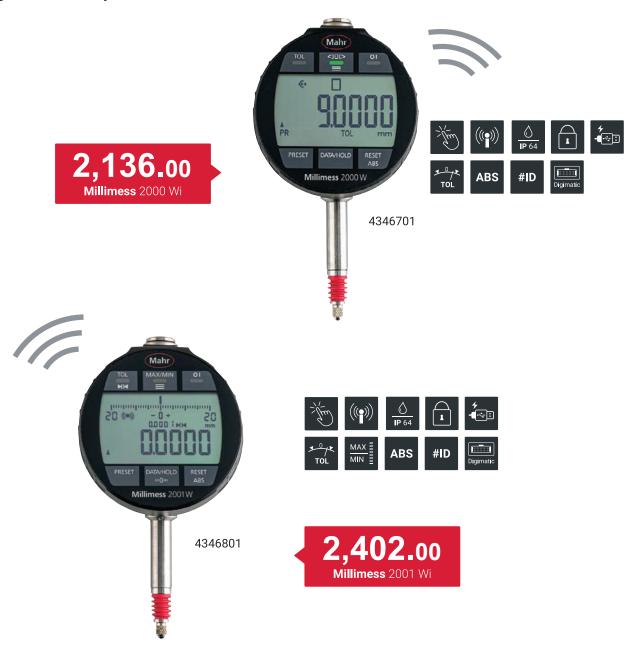

Order no.	Product	Measuring range	Resolution	Details	List price	Offer price		
		mm	mm		EUR	MYR		
4346701	2000 Wi	± 1	0,0001	Highest sensitivity and accuracy, for static measuring tasks	-795,00-	2,136.00		
4346801	2001 Wi	± 1	0,0001	Highest sensitivity and accuracy, for static and dynamic measuring tasks	-894,00-	2,402.00		
Accessories for measuring instruments with Integrated Wireless								
4102220	, , , , , , , , , , , , , , , , , , ,							

MarCal 16 ER / 16 EWR

Digital calipers without data output



Order no.	Product	Measuring range	Resolution	Depth rod	Details	List price	Offer price
		mm	mm			EUR	MYR
4103010	16 ER	0 - 150	0,01	round	Lapped guideway	133,00	358.00
4103012	16 ER	0 - 150	0,01	square	Lapped guideway	-133,00-	358.00
4103205	16 ER	0 - 200	0,01	square	Lapped guideway	219,00	589.00
4103300	16 EWR	0 - 150	0,01	round	Protection class IP 67	- 197,50 -	532.00
4103302	16 EWR	0 - 150	0,01	square	Protection class IP 67	- 197,50 -	532.00
4103304	16 EWR	0 - 200	0,01	square	Protection class IP 67	-288,00-	774.00



MarCal 30 EWR

Digital depth gages




Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4126651	30 EWR	0 -150	0,01	Protection class IP67	-445,00 -	1,196.00
4126652	30 EWR	0 -200	0,01	Protection class IP67	-519,00 -	1,395.00
4126653	30 EWR	0 -300	0,01	Protection class IP67	-588,00-	1,580.00

MarCal | Vernier calipers

MarCal 16 FN

Pocket calipers

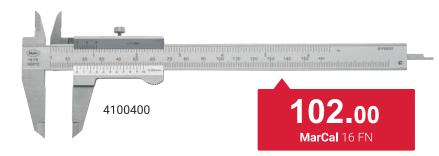

Order no.	Product	Measuring range	Vernier value	Depth rod	List price	Offer price
		mm	mm/inch		EUR	MYR
4100400	16 FN	0 -150	0,05/1/128"	square	- 37,00 -	102.00
4100401	16 FN	0 - 200	0,05/1/128"	square	-100,50-	272.00

Micromar 40 ER / 40 EWR / 40 EWR-L

The insensitive ones for production and workshop





Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4157010	40 ER	0 - 25	0,001	Protection class IP40	- 197,50 -	784.00
4157011	40 EWR	0 - 25	0,001	Protection class IP65	- 248,50 -	986.00
4157012	40 EWR	25 -50	0,001	Protection class IP65	344,00	1,363.00
4157020	40 EWR-L	0-25	0,001	IP65, data output, QUICK DRIVE, 5 mm per rotation	- 426,00 -	1,688.00
4157021	40 EWR-L	25 - 50	0,001	IP65, data output, QUICK DRIVE, 5 mm per rotation	-486,00-	1,924.00

Micromar 40 A / 40 SA / 40 AS

Basics for production and workshop



4134050



4190352

Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4134000	40 A	0 – 25	0,01	Glare-free matt chrome-plated display parts	67,00-	266.00
4134001	40 A	25 – 50	0,01	Glare-free matt chrome-plated display parts	105,00-	418.00
4134050	40 SA/SET	0 -100	0,01	Set of 4 micrometers	-394,00-	1,560.00
4190350	44 AS/SET	6 – 12	0,001	incl. setting rings 8 mm, 10 mm	1.325,00	5,246.00
4190351	44 AS/SET	12 - 20	0,001	incl. setting ring 16 mm	1.010,00	3,999.00
4190352	44 AS/SET	20 - 50	0,005	incl. setting rings 25 mm, 40 mm	2.285,00	9,046.00
4190353	44 AS/SET	50 - 100	0,005	incl. setting rings 60 mm, 85 mm	2.720,00	10,767.00

Micromar 44 EWR /844 EWR



Digital 3-point inside micrometer / Digital 3-point inside measuring device
















12,950.00 Micromar 844 EWR-SET



Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4191240	44 EWR	6 – 12	0,001 / .00005"	Measurement of through holes and blind holes	2.170,00	9,306.00
4191241	44 EWR	12 - 20	0,001 / .00005"	Measurement of through holes and blind holes	1.850,00	7,934.00
4191242	44 EWR	20 - 50	0,001 / .00005"	Measurement of through holes and blind holes	2.920,00	12,522.00
4191243	44 EWR	50 – 100	0,001 / .00005"	Measurement of through holes and blind holes	3.500,00	15,008.00
4192240	844 EWR	6 – 12	0,001 / .00005"	Measurement of through holes and blind holes by lever release	2.050,00	8,791.00
4192241	844 EWR	12 - 20	0,001 / .00005"	Measurement of through holes and blind holes by lever release	2.120,00	9,091.00
4192242	844 EWR	20 – 50	0,001 / .00005"	Measurement of through holes and blind holes by lever release	3.020,00	12,950.00
4192243	844 EWR	50 – 100	0,001 / .00005"	Measurement of through holes and blind holes by lever release	3.600,00	15,438.00

MarTest 800 S / 800 SG / 800 SGM / 800 SL / 810 A

Highly sensitive measuring

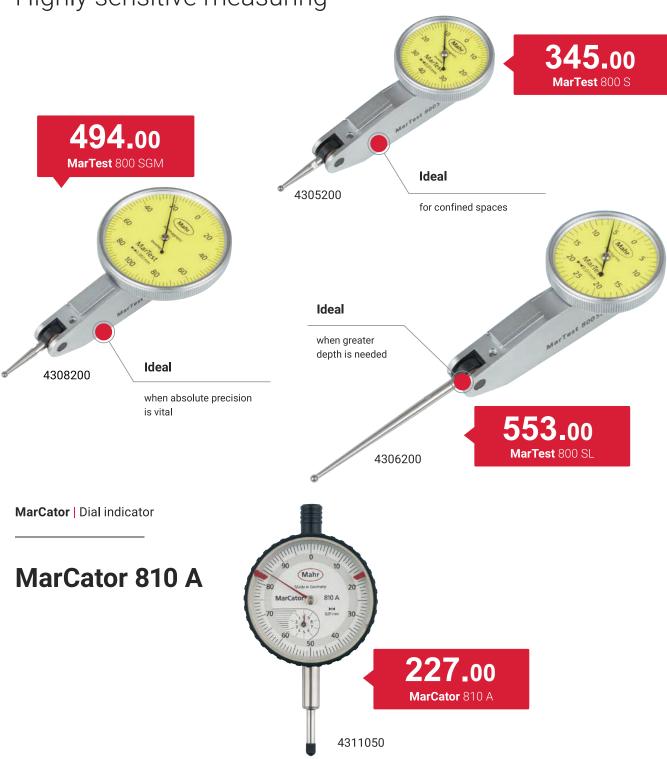

Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4305200	800 S	± 0,4	0,01	Dial ø 28 mm, measuring insert length 14.5 mm	108,50	345.00
4307200	800 SG	± 0,4	0,01	Dial ø 38 mm, measuring insert length 14.5 mm	-109,50-	349.00
4308200	800 SGM	± 0,1	0,002	Dial ø 38 mm, measuring insert length 14.5 mm	-156,00-	494.00
4306200	800 SL	± 0,25	0,01	Dial ø 28 mm, measuring insert length 41.24 mm	-174,50 -	553.00
4311050	810 A	10	0,01	High-contrast dial face	- 54,50 -	227.00

MarCator 1075 R / 1086 R / 1087 R Digital dial indicators



Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4336010	1075 R	12,5	0,01	Basic functions for static measuring tasks	-184,50-	764.00
4336020	1075 R	12,5	0,005	Basic functions for static measuring tasks	-257,00 -	1,063.00
4336030	1075 R	12,5	0,001	Basic functions for static measuring tasks	-383,00-	1,580.00
4337780	1086 R	12,5	0,01	for static measurements such as lengths, distances and length differences	-357,00 -	1,473.00
4337700	1086 R	12,5	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences	440,00	1,817.00
4337701	1086 R	25	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences	-540,00 -	2,227.00
4337800	1087 R	12,5	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences, dynamic measurements such as radial run-out, straightness and flatness using MAX / MIN / MAX-MIN functions	-527,00 -	2,174.00
4337801	1087 R	25	0,0005, 0,001, 0,002, 0,005, 0,01	for static measurements such as lengths, distances and length differences, dynamic measurements such as radial run-out, straightness and flatness using MAX / MIN / MAX-MIN functions	-607,00-	2,503.00

Millimess 1002 / 1003 / 1003 XL / 1010 / 2000 W / 2001 W

Everything reliably under control





Order no.	Product	Measuring range		ring range Display resolution		Details	List price	Offer price
		mm	μm	mm	μm		EUR	MYR
4335000	1002		± 25		0,5	Precision ball bearing of measuring spindle	-449,00-	1,207.00
4334000	1003		± 50		1	Precision ball bearing of measuring spindle	-251,00-	675.00
4334001	1003 XL		± 130		2	Precision ball bearing of measuring spindle	-251,00-	675.00
4332000	1010		± 250		10	Precision ball bearing of measuring spindle	-187,00-	504.00
4346700	2000 W	± 1		switchable 0,0001 0,01 mm/ .000005"0005"		Inductive measuring system, practical functions for static measuring tasks	-747,00 -	2,008.00
4346800	2001 W	± 1		switchable 0,0001 0,01 mm/ .000005"0005"		Inductive measuring system, practical functions for static and dynamic measuring tasks	-846,00	2,273.00

Millimar C 1200 / P 2004

Smart and universal application





Order no.	Product	Numerical display	Resolution	Details	List price	Offer price
		μm	μm		EUR	MYR
5312012	Millimar C 1200 M	± 5000	0,1	High-resolution, high-contrast TFT color display	1.210,00	5,454.00
5312011	Millimar C 1200 T	± 5000	0,1	High-resolution, high-contrast TFT color display	1.210,00	5,454.00

Order no.	Product	Measuring range	Measuring force	Details	List price	Offer price
		mm	Ν		EUR	MYR
5323010	P 2004 M	± 2	0,75	Inductive probe	342,00	1,544.00
5323011	P 2004 T	± 2	0,75	Inductive probe	342,00	1,544.00

Millimar | Evaluation units and measuring probes

Millimar C 1202 / N 1702

Flexible evaluation and display anywhere



4,687.00

5312025



5331120

5331125



Order no.	Product	Numerical display	Resolution	Details	List price	Offer price
		μm	μm		EUR	MYR
5312025	Millimar C 1202	± 999 999,9	0,01, 0,1, 1	High-resolution, high-contrast TFT color display	1.040,00	4,687.00

Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	μm		EUR	MYR
5331120	Millimar N 1702 M	± 2	0,1	Module for 2 inductive probes, Resolution 0.1 μm	-456,00-	2,057.00
5331125	Millimar N 1702 M-HR	± 0,2	0,01	Module for 2 inductive probes, Resolution 0.01 µm	- 972,00 -	4,381.00

Digimar 814 SR

Ideal for the workshop, robust and universally applicable



Order no.	Product	Measuring range	Resolution	Details	List price	Offer price
		mm	mm		EUR	MYR
4426100	814 SR	0 – 350	0,01	Digit height 12 mm, handwheel for positioning and measuring	- 792,00 -	3,572.00
4426101	814 SR	0 – 600	0,01	Digit height 12 mm, handwheel for positioning and measuring	1.370,00	6,175.00
4426104	814 SR	0 – 980	0,01	Digit height 12 mm, handwheel for positioning and measuring	1.785,00	8,045.00

Precimar SM 60 / SM 60-V

Simple and robust, ideal for production and QA





changeable anvils

Order no.	Product	Indicator range	Application range	Mount ø	Details	List price	Offer price
		mm	mm	mm		EUR	MYR
5357360	SM 60	25	0 - 60	8	Table size ø 60 mm	1.685,00	4,888.00
5357370	SM 60	25	0 – 60	8	Table size ø 60 mm	1.685,00	4,888.00
5357380	SM 60-V	25	0 - 60	8	Table size Ø 60 mm, including pair of carbide measuring anvils Ø 3.5 mm	1.780,00	5,088.00
Indicating instru	ment not inclu	ded in delivery					

Accessories			
5357311	Measuring anvil set for SM 60-V 2x 40 Ef (flat), 40 Ea (offset), 40 Et (disk), 40 Er (spherical), 40 Ep (cone), 40 Es (cutting edge)	-389,00-	1,008.00

Precimar SM 350 / 650 / 1150



Convenient adjustment of measuring equipment

Time and cost savings

Simply enter the desired reference value and the setting instrument moves to the desired dimension. No more timewasting searching for the correct setting ring diameter or putting together gage block combinations.


50,000

Simply adjust dimensions by touch

The intuitive operation is carried out using large, clear keys for quick and straightforward settings.


Superior convenience

Creating favorites makes regular adjustments even easier. The corresponding dimension is set directly by scanning the barcode on the measuring instrument.



Universal measuring

instruments

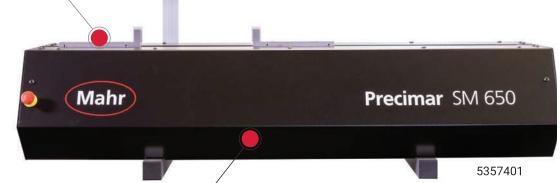

High accuracy

With an accuracy of 0.7 µm + L/ 1000, gage block combinations and setting rings can be easily replaced.

45,173.00

Order no.	Product	Indicator range	Application	Mount ø	Details	List price	Offer price
			range				
		mm	mm	mm		EUR	MYR
5357400	SM 350	350	0 - 355		Setting instrument	13.650,00	35,337.00
5357401	SM 650	650	0 – 655		Setting instrument	17.450,00	45,173.00
5357402	SM 1150	1150	0 – 1155		Setting instrument	21.950,00	56,822.00

MarSurf PS 10

Mobile measuring made easy

Including new surface standard **DĬN EN ISO 21920**

The MarSurf PS 10 is the ideal entry level instrument for surface metrology: Its extraordinarily simple and intuitive operation, along with numerous safety functions including the automatic cutoff, make the device as easy to control as a cellphone. Due to its minimal size, it is also perfect for location-independent measurements - vertical, horizontal and even overhead if necessary. And thanks to the removable drive unit, the MarSurf PS 10 can be used flexibly in production.

lightweight

The measuring instrument boasts three order options for increased flexibility: with stylus tip 2 μ m, 5 μ m and also a variant with a transverse drive unit (MarSurf PS 10 C2).

- Intuitive operation: As easy as using a smartphone with a rotatable display
- Creates complete PDF measuring records right in the measuring instrument and data backup as TXT, X3P, CSV and PDF files
- Customized comments for the PDF measuring record entered directly into the MarSurf PS 10
- Error-free operation thanks to an integrated, removable roughness standard
- Automatic cutoff selection, ensuring that even non-specialists get the correct measuring results
- PHT Probe easy to clean

other optional probes



Always at hand


The calibration standard stays in the instrument and can be checked at any time.

Extremely easy to operate with detailed profile display

The large 4.3" high-resolution and backlit TFT touch display allows intuitive operation and precise representation of the measuring profile.

Perfect evaluation and documentation

Measuring records are automatically created in the instrument without the need for additional software.

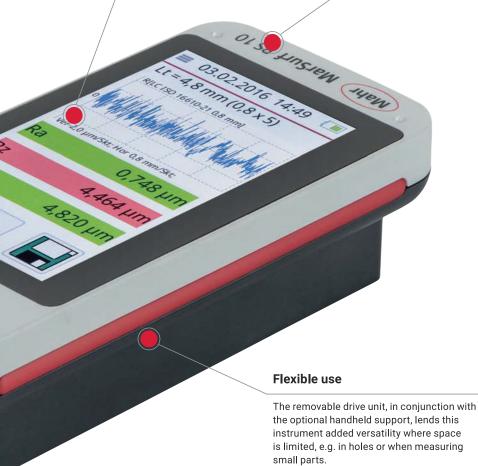

measurements

can be stored in the instrument

parameters

same range of functions as a laboratory instrument

TFT touch display

similar to a smartphone

at least

measurements

without power supply

8,688.00 MarSurf PS 10



Order no.	Product	Measuring range	Probe	Details	List price	Offer price
		μm			EUR	MYR
6910230	PS 10	350	Skidded probe system	Storage capacity for min. 3900 profiles, min. 500,000 results, min. 1500 PDF protocols, expandable with microSD card up to 32 GB	2.620,00	8,688.00

MarSurf M 310

Brings added value for mobile roughness measurement

Including new surface standard **DÍN EN ISO 21920**

Are you used to using your smartphone to access your data anytime, wherever you are? That is exactly what Mahr's MarSurf M 310 provides you with: A versatile device for the mobile recording and evaluation of measuring data. Simple operation and a robust design make this Mahr product perfectly suited for use in production, where dirt and dust can clog the instrument and it is often users with little prior knowledge performing the quality control.

For all those who need more

The MarSurf M 310 has the same functions as the PS 10 but has even more crucial added benefits for you:



Print directly, document easily

Measuring results in paper form? Sometimes still the fastest way! The mobile printer allows you to save data on thermal paper, which can then be added directly to the workpiece.



Preprogrammed measuring functions for immediate measuring success

A variety of measuring parameters can be defined, saved and then called up on the workpiece in the device settings. Additionally, it works using a barcode scanner, which simply connects to the MarSurf M 310. This allows even workers without expert knowledge or training to determine reliable roughness parameters.




Robot ready: Integrate instrument directly in the production line

The MarSurf M 310 and its interfaces can be directly integrated into your production lines, such as for measuring tasks on the robot arm. They control the measuring instrument remotely - conveniently from your computer, for example.

Status at a glance

Instrument status at a glance thanks to two easily visible status LEDs. Depending on the signal color, a measurement is underway, data is being transferred or an error has been detected. Standby mode shows the charging status.



Equipped for virtually any environment: The robust skidded probe system means that the measuring instrument is less sensitive to vibrations. The PHT probe is easy to clean due to its open skid.

Modern optics, perfect display

A high resolution, backlit 4.3" TFT display ensures precise display of your measuring results. It is oper-ated directly via the touchscreen - just as you are used to with your smartphone.

IATF compliant

The MarConnect duplex interface enables the transmission of a measuring equipment ID with each measurement. This makes measuring results traceable at any time.

Mali Marsur N 310

Software with a success guarantee

With this measuring instrument, you can reliably determine roughness parameters even without expert knowledge or training due to intuitive software, clear menu structures and preprogrammed measuring functions.



11,888.00 MarSurf M 310 SET

Order no.	Product	Measuring range	Probe	Details	List price	Offer price
		μm			EUR	MYR
6910260	MarSurf M 310 SET	350	Skidded probe system 2 µm probe tip	Storage capacity for min. 3900 profiles, 1500 PDF protocols and 500,000 results, expandable with microSD card up to 32 GB	3.435,00	11,888.00
6910267	MarSurf M 310 SET with printer		Skidded probe system 2 µm probe tip	Additionally with Star Micronics SM-L200 USB/Bluetooth® printer and docking station for direct printout of profiles, ADC and MRC diagram and measurement results	3.940,00	13,388.00

8 Bluetooth®

MarSurf M 410

Simple, innovative, flexible – modern surface metrology to be used by hand

Mobile recording and evaluation of measuring data has never been this easy. The MarSurf M 410 is convenient and flexible to use – just a like a modern smartphone. It has a practical touch display, an integrated PDF memory, innovative accessories, and wireless data transfer - all of which effectively simplify your workload.

Benefit from functions that only Mahr can offer you. In addition to the practical and efficient design and the flexibility this offers, the MarSurf M 410 also has an automatic filter setting by detecting the surface structure. This automatic contacting also guarantees the unmatched reliability of your measurements. The magnetic 3-point holder for the probe arm and the freely combinable accessories offer additional process security.

Including new surface standard **DÍN EN ISO 21920**

Possible to separate the display and probe system

Optionally, you can use the measuring instrument as a mini mobile measuring station, for example by simply attaching the display to the wall using the supplied pivoted docking station.



Advantages

- Increased efficiency thanks to large integrated memory: More than 500,000 measuring programs and 1,500 PDF reports, can be expanded by 32 GB (microSD)
- · Skidless probes ensure that the roughness and waviness can be measured without an additional measuring station being required - determination of parameters R, W
- · Safe measuring results thanks to automated cutoff option
- · Automatic zeroing ensures process and material safety
- IATF ready simply activate/deactivate in the menu by automatically transferring the item and serial number of the measuring instrument
- · Free MarCom software to transfer data



Probe arms can be changed quickly without tools and with additional protection: The magnetic 3-point holder ensures that the probe will not be broken in the event of a collision; it will simply be released by the magnetic holder.

Intuitive operation via touch display

Easy to operate just like a smartphone so that no training or introduction to the operating functions is required - you can just get started.

Simple alignment of the probe system

The inclination is easy to correct via the menu-driven, graphic instructions.

Creation of PDFs directly on the device

Practical: The device creates a complete PDF file without the need for additional software or transfer to a computer. Information can be added to the PDF files directly on the

Wireless data transmission

Connect your measuring device wirelessly to a PC, for example, and transfer your data to Microsoft Excel or other evaluation software.



Importing information using a scanner

Simply start your measuring program by scanning a QR or barcode. You do not need to enter any profile information as your saved measuring programs are linked with a corresponding code.






Order no.	Product	Measuring range	Probe	Details	List price	Offer price
		μm			EUR	MYR
6910290	MarSurf M 410 Set	500 μm (±250 μm)	mm to1500 µm (±750 µm) with probe arm length	Storage capacity for min. 3900 profiles, 1500 PDF protocols and 500,000 results, expandable with microSD card up to 32 GB (increases the storage capacity by a factor of 320)	-8.940,00-	41,888.00
6910291	MarSurf M 410 Set (incl. printer)		mm to1500 μm (±750 μm)	Additionally with Star Micronics SM-L200 USB/Bluetooth® printer and docking station for direct printout of profiles, ADC and MRC diagram and measurement results	-9.445,00-	43,888.00

MarSurf CD 140 AG 11

Versatile with intelligent probe system

Mahr has launched a new contour measuring machine on the market - the MarSurf CD 140 AG 11. Its probe system has a measuring range of up to 70 mm and the stylus tips can be replaced quickly and without any tools - without having to recalibrate the system.

The new contour measuring machine MarSurf CD 140 AG 11 enables the user to complete fast and precise measurements. Its flexible workpiece holder makes it particularly easy to handle, while users are also convinced by its extreme versatility - it can also be used to measure roughness. The intelligent probe system and magnetic stylus tip holder ensure the process to replace stylus tips without any tools is the most straightforward process to date. Operators can also choose from a comprehensive range of clamps and workpiece holders. The new MarSurf CD 140 AG 11 can be used in a static position or directly at the location of the workpiece.

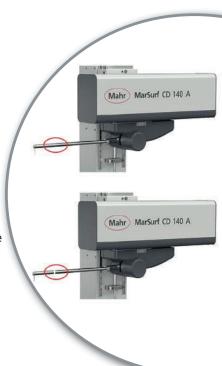



Advantages


- · Comprehensive contour measurement functions fast and simple
- Quick adjustment of the Z-axis with handles that are simple to operate
- · Replacement of the stylus tip without any tools
- · Travel speed in the X-axis of up to 200 mm/s
- · Simple program creation or single measurement using MarWin
- Automatic evaluation, best adjustment of contours, CAD contour comparison, and a lot more
- · Flexible support plate with 50 mm bore grid for KMG workpiece holder, amongst other
- Optionally expandable with option of roughness measurements (Rz >2 µm)
- · Measurement with double stylus







Plug-in guide stops and a wide range of standardized clamping devices as well as workpiece holders enable flexible positioning of your testpiece.

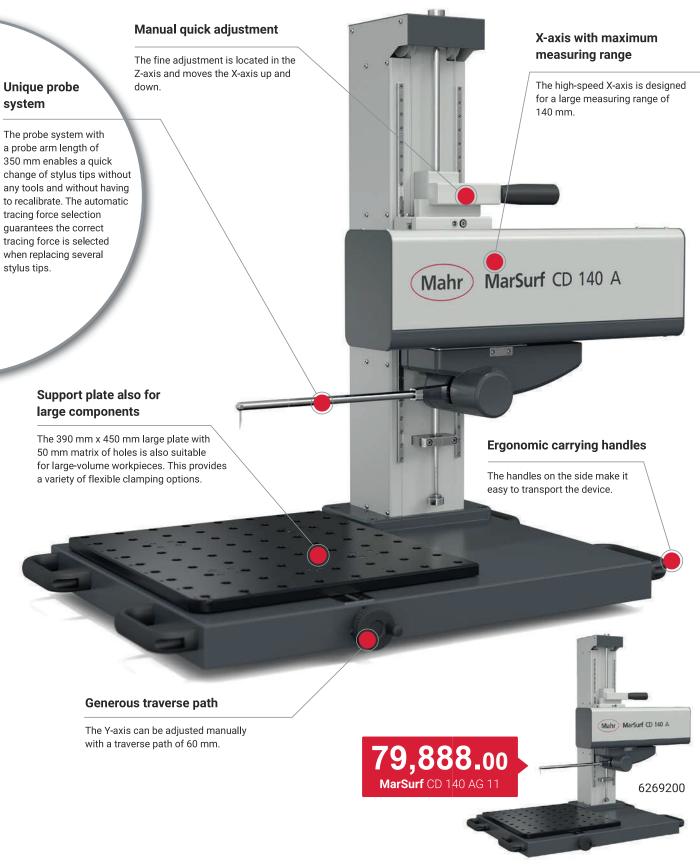

Order no.	Product	Measuring range	Probe	Details	Offer price
					MYR
6269200	MarSurf CD 140 AG 11	70 mm	with probe arm length 350 mm	Measuring force 4 mN to 30 mN, adjustable via software, measuring speed 0.1 mm/s to 10 mm/s, positioning speed X: 0.1 mm/s to 200 mm/s	79,888.00
6269202	MarSurf CD 140 AG 11 (incl. option Roughness)	70 mm	with probe arm length 350 mm	Measuring force 4 mN to 30 mN, adjustable via software, measuring speed 0.1 mm/s to 10 mm/s, positioning speed X: 0.1 mm/s to 200 mm/s	98,888.00

Compact all-rounder for

surface metrology

We have added the new MarSurf SD 140 AG 11 to our portfolio of manual surface measuring instruments: it can check both roughness and contour features - in just one measuring phase. This measuring station offers easy handling and reliable quality assurance thanks to its high functionality. It is therefore also a suitable entry-level model for stationary surface metrology.

The heart of the MarSurf SD 140 AG 11 is the new tactile probe system. This can record the measurements for roughness and contour at the same time, which the software then evaluates separately. The probe arm measuring range spans 10 mm (100 mm probe arm) and 25 mm (250 mm probe arm), and the positioning speed can be set from 0.1 mm/s to 200 mm/s via software.

The probe system's tool-free probe arm quick-change function also saves time, allowing you to quickly switch to another measuring task without having to recalibrate the new probe arm. The electronic probe arm detection and automatic measuring force selection provide even more reliability. These ensure that the correct contact/measuring force is always guaranteed when switching between several stylus tips.

Support plate with hole grid

Thanks to the special support plate, you can use a wide variety of workpiece holders and clamps flexibly and quickly.

Y-axis manually adjustable

The operator can manually adjust the Y-axis using the integrated 60 mm adjustment.



Advantages

- · Measure roughness and contour in one go
- · Tool-free probe arm quick-change function
- · Electronic probe arm detection
- · Automatic measuring force selection
- · Defined start position with aligned axis
- Flexible clamping system: Support plate (390 mm x 450 mm) with 50 mm hole grid



More details can be found on our website:

metrology.mahr.com/ marsurf-tactile-measuring-instruments



Order no.	Product	Probe	Details	Offer price
				MYR
6269300	MarSurf SD 140 AG 11	Roughness and contour probe system	including software, without calibration master, the positioning speed of 0.1 mm/s to 200 mm/s can be set via software	148,888.00



Mahr GmbH Carl-Mahr-Straße 1 37073 Göttingen Germany

Phone: +49 551 7073 800 info@mahr.com www.mahr.com

Available from:



BESMIC OPTIC INDUSTRY (M) SDN BHD

266 & 268 JALAN PERMATANG DAMAR LAUT, BAYAN LEPAS, 11960, PENANG, MALAYSIA.

Phone number - 604-6263072 sales@besmicoptic.com www.besmicoptic.com